

## SUPPORTS UPC COMPONENTS:




- CONNECTORS
- BARE FERRULES
- MIL-SPEC TERMINI / CONTACTS

INDEPENDENT SUSPENSION

OPTICALLY ALIGNED FIXTURE

TELCORDIA COMPLIANT

IN-LINE VIDEO INSPECTION

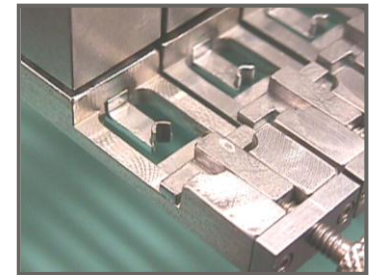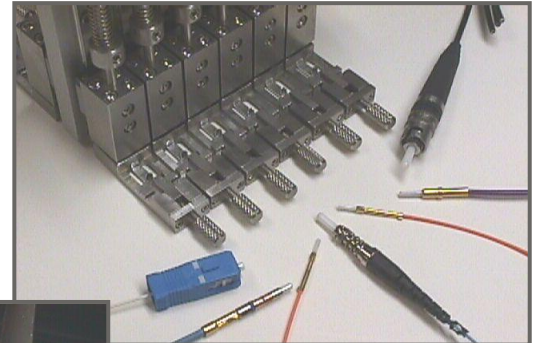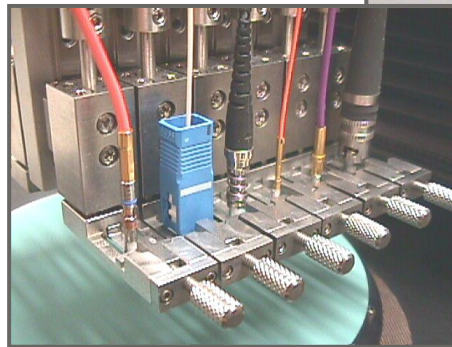

## SPECIFICATIONS AND FEATURES

### Polisher Compatibility

Scepter™  
SpecPro™  
Rev™  
Proton™

### Capacity (polisher dependent)

Up to 12 components

### Component Engagement

Precision v-groove mechanism

### Ferrule Diameter Support

Standard 1mm to 3.2mm Connector Capacity  
Modified fixtures available for smaller diameters

### UPC Component Support

#### **Connectors**

SC, FC, ST, LC, MU, E2000, F3000, SMA, ferrules,  
bare fiber adapters

#### **Mil-spec Termini**

M29504 (1, 1.25, 1.6, 2mm), TFOCA, ARINC 801

## EXAMPLES

