




**VARIABLE ANGLE CONTROL**  
**ADAPTERS FOR VARIOUS FIBER DIAMETERS**  
**ADAPTERS FOR CONNECTORS**  
**PRODUCTION AND R&D APPLICATIONS**  
**COST-EFFECTIVE PROCESSING**

**SPECIFICATIONS AND FEATURES**

**Polishing Performance**

**Angle Range<sup>1</sup>**  
0 (flat) to 50 degrees  
**Angle Repeatability**  
± 0.5 degrees, typical  
**Polishing Motion**  
Random Orbital  
**Polishing Speed**  
User Adjustable  
**Film Size**  
4 inch Diameter

<sup>1</sup> Referenced off fiber diameter (i.e. 8° for APC style connector polish)

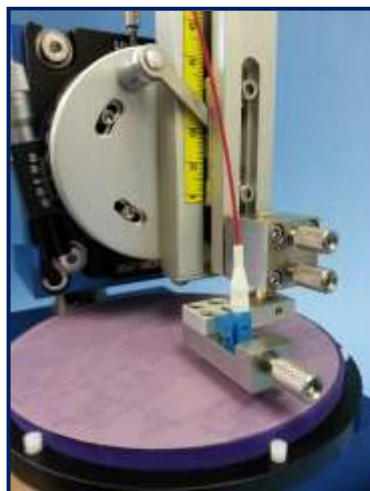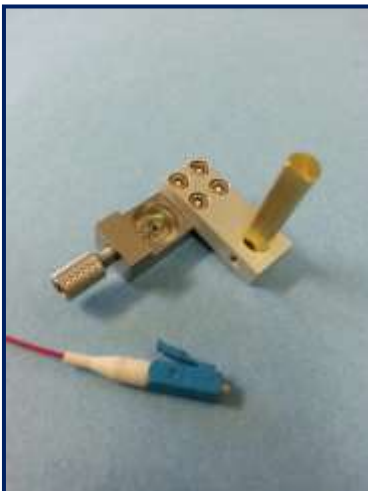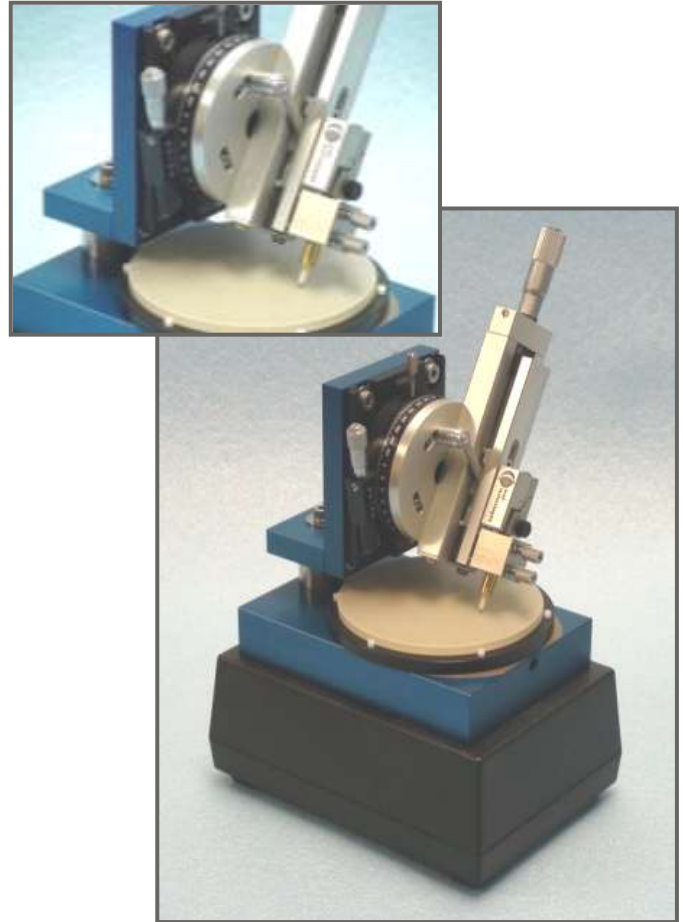

**CONNECTOR ADAPTERS**

**INTERFACES WITH RADIAN™ POLISHER**  
**FLAT, UPC AND ANGLE GEOMETRIES<sup>1</sup>**  
**ALSO SUPPORTS FERRULES AND LENSES**  
**VARIABLE ANGLE POLISHING<sup>2</sup>**

Expand Radian's™ versatility beyond bare fiber processing. Adapters are available for polishing a variety of industry standard and custom connector/ferrule types.

**Note 1: Endface geometries not necessarily Telcordia.**  
**Note 2: Angle range dependent upon ferrule protrusion.**

Specifications subject to change without notice    Rev. 2, 1/13